




PRODUCT DATA SHEET

JASA 400C

The **JASA 400C**, part of the NXXT family, is revolutionary, innovative, and modular. Designed to meet our customers' highest expectations, it offers superior cleanability, flexibility, rapid changeovers, enhanced operator safety, energy efficiency, faster processing speeds, and improved serviceability.

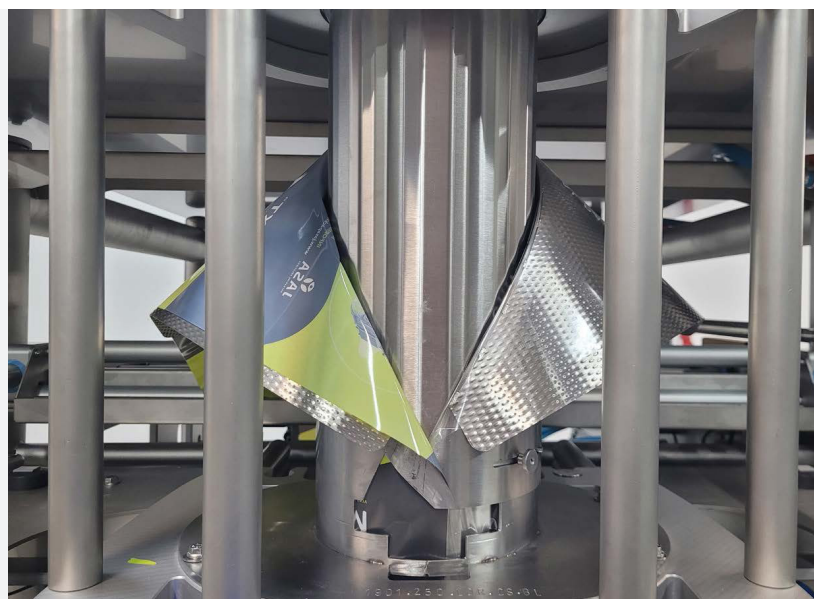

The machine is specially designed packaging of processed and frozen foods, in addition to the traditional potatoes vegetables and fruits.

JASA 400C

Cleanability

**Energy-efficient
and reliable**

**Quick and flexible
changeovers**

**Higher
processing speeds**

**Enhanced
(operator) safety**

Easy maintenance



BAG STYLES



Pillowbag



Gusseted bag



Carry-bag



Doy style



Blockbottom

BAG SIZES

Bag width, centric sealed (mm)	180-400
Bag width, excentric sealed (mm)	180-320
Bag length, in one sealstep (mm)	450 at IM

PACKAGING MATERIALS

JASA 400C

Polyethylene	V
Polypropylene	V
Laminated film	V
Heatsealable paper	V
Pre-sealed film-net combination	V



Energy
efficient



Packaging
material
savings



Low air
consumption



High
capacity



Quick
Changeovers


AVAILABLE OPTIONS

JASA 400C

Film splice module with tape unit	V
Film splice module with sealing unit	V
Thermo transfer printer	V
Label applicator	V
Perforator module	V
Driven roll	V
Photo eye - detection blocked funnel	V
MAP connection	V
Horizontal sealing system - heatseal	V
Horizontal sealing system - multiseal	V
Horizontal sealing system - multiseal handgrip	V
Side gusset module	V
Airpress unit	V
Heating electrical cabinet (*)	V
RFID tag for user login	V

ACCESSOIRES

Lift for forming set and film roll	V
Forming set storage	V

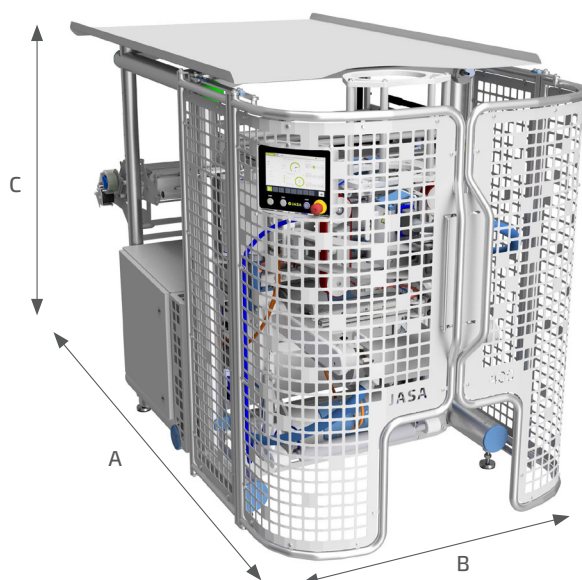

DIMENSIONS*

JASA 400C

Max. length (A) (mm)	2715
Max. width (B) (mm)	1420
Max. height (C) (mm)	1.930
Max. Outside diameter film reel (mm)	600

*Exact dimensions depend on the final configuration of the machine.

JASA Packaging Solutions stands for innovation, quality and flexibility in packaging technology. We specialize in developing and manufacturing vertical packaging machines, sleeves and complete weighing and packaging lines. Producers and packers of all kinds of food products around the globe trust our expertise, for almost 40 years, 24/7.

MODEL	JASA 400C
Mechanical capacity** (pack./min.)	120
Changeover time (min.)*	5-7
Electrical capacity (kW)	6
Electrical requirements	3x400VAC+N+PE, 50HZ (Europe standard) USA upon request
Necessary air pressure (bar)	6
Pneumatic capacity* (l/min.)	140
Compressed air specifications	ISO 8573-1:2010[7:4:4]
IP rating machine	IP66 or IP54
Sound pressure (dB(A))	78
Sound power level (dB(A))	93
EC declaration	yes
Country of origin	the Netherlands
Customs tariff code	84223000
Packaging dimensions* (L*W*H)(mm)	3250 x 1650 x 2100
Nett weight* (kg)	1400
Packaging weight (kg)	1520
Film roll - max weight (kg)	60
Film roll - max diameter (mm)	600
Machine configuration	left/right

* Exact capacity, dimensions and weight depend on the implementation of the machine.

** The achieved capacity in the field depends on the actual product & film type and properties, bag length, portion size, infeed method operator efficiency and environmental conditions.



Headoffice:
 Visiting address: Butter 17, 1713 GM Obdam (NL)
 T +31 72 561 27 00
 E sales@jasa.nl
 W www.jasapackaging.com

All data, products and productspecifications are intended for general information only and subject to change without notice.